


FEATURES

For use in low voltage, high frequency inverters
Free wheeling, and polarity protection applications.

MARKING: B5817W: SJ

B5818W:SK

B5819W: SL




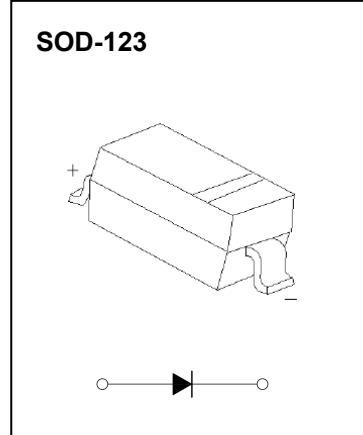
**Maximum Ratings and Electrical Characteristics, Single Diode @Ta=25°C**

Parameter	Symbol	B5817W	B5818W	B5819W	Unit
Non-Repetitive Peak Reverse Voltage	V _{RM}	20	30	40	V
Peak Repetitive Peak Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RMM} V _{RWM} V _R	20	30	40	V
RMS Reverse Voltage	V _{R(RMS)}	14	21	28	V
Average Rectified Output Current	I _o		1		A
Peak Forward Surge Current @t=8.3ms	I _{FSM}		9		A
Repetitive Peak Forward Current	I _{FRM}		1.5		A
Power Dissipation	P _d		500		mW
Thermal Resistance Junction to Ambient	R _{θJA}		250		°C/W
Storage Temperature	T _{STG}		-55~+150		°C

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Reverse breakdown voltage	V _(BR)	I _R = 1mA B5817W B5818W B5819W	20 30 40		V
Reverse voltage leakage current	I _R	V _R =20V V _R =30V V _R =40V B5817W B5818W B5819W		1	mA
Forward voltage	V _F	B5817W I _F =1A I _F =3A		0.45 0.75	V
		B5818W I _F =1A I _F =3A		0.55 0.875	V
		B5819W I _F =1A I _F =3A		0.6 0.9	V
Diode capacitance	C _D	V _R =4V, f=1MHz		120	pF


Typical Characteristics

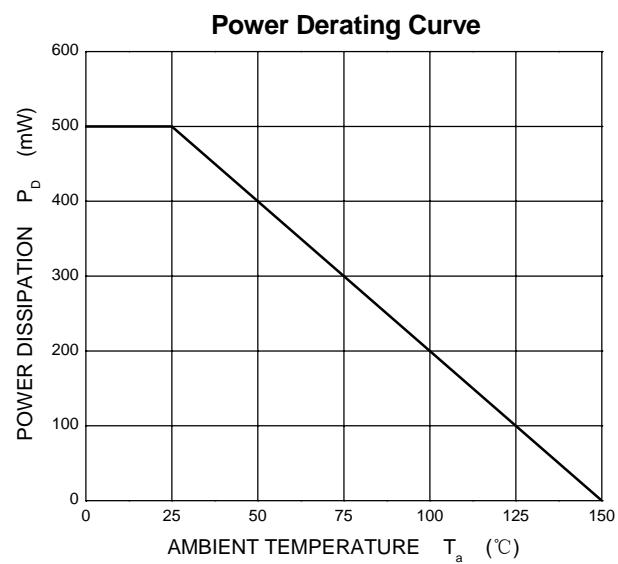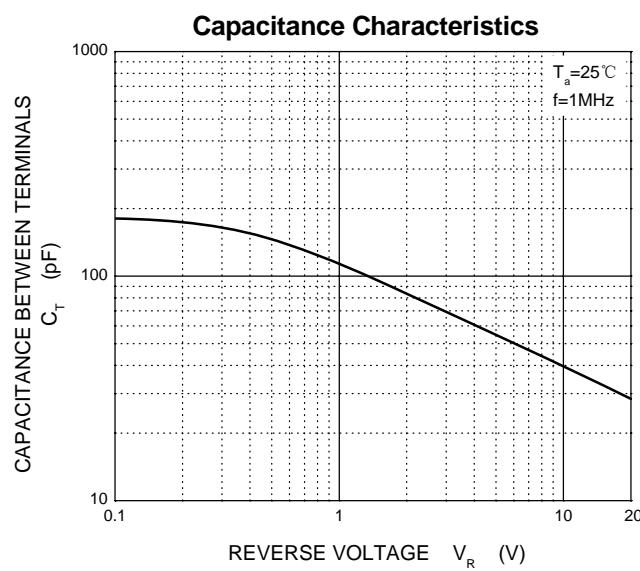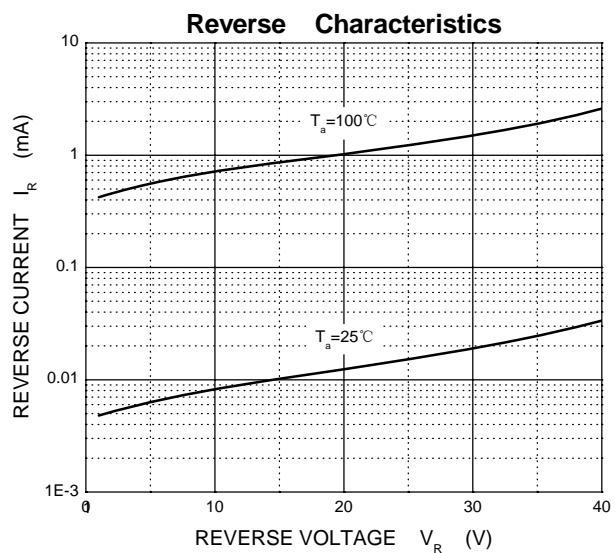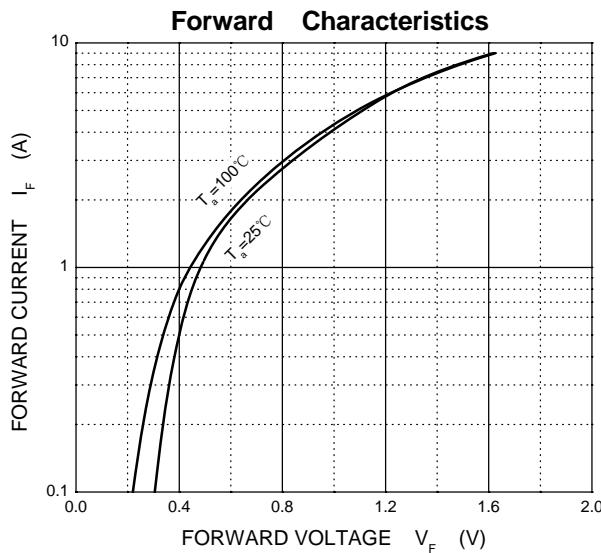

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-123

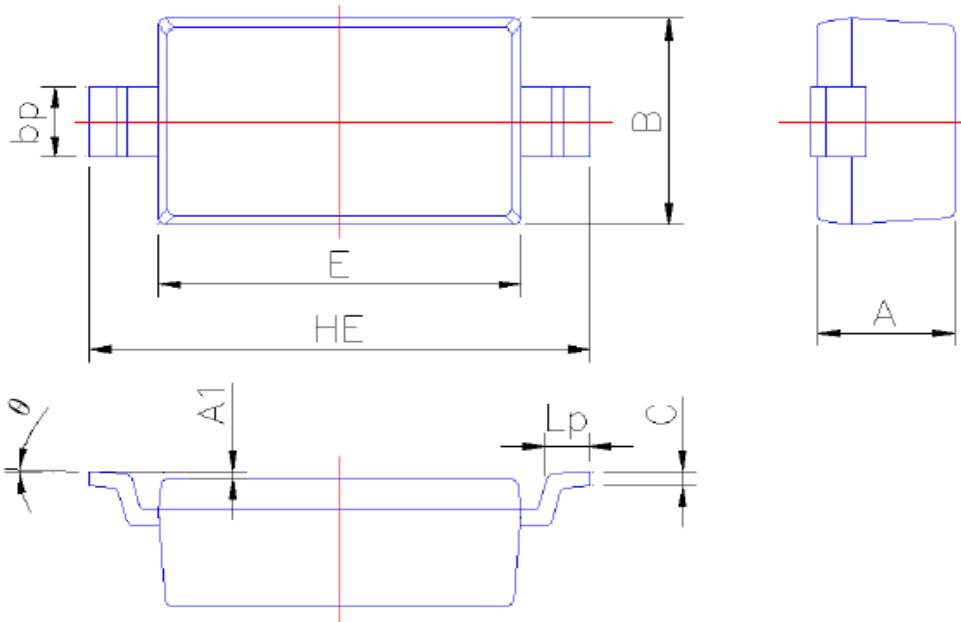

Symbol	Dimension in Millimeters	
	Min	Max
A	0.95	1.15
A1	0.01	0.100
B	1.55	1.65
bp	0.50	0.70
C	0.09	0.150
E	2.60	2.70
HE	3.45	3.85
Lp	0.20	0.45
θ	0°	5°