


**FEATURES**

- Metal of silicon rectifier, majority carrier conduction
- Guard ring for transient protection
- Low power loss, high efficiency
- High current capability, low VF
- High surge capacity
- Plastic package has UL flammability classification 94V-0

**MECHANICAL DATA**

- Case : T0-220F molded plastic
- Polarity : As marked on the body
- Mounting position : Any

TO-220F PACKAGE

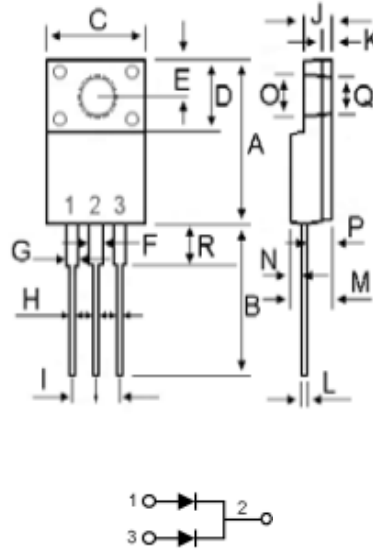

DIM	MILLIMETERS	
	MIN	MAX
A	15.67	16.07
B	12.90	13.30
C	9.96	10.36
D	6.50	6.90
E	2.65	2.75
F	1.20	1.24
G	1.26	1.46
H	0.70	0.90
I	2.34	2.74
J	2.32	2.72
K	0.60	0.90
L	0.45	0.60
M	4.53	4.93
N	1.30	1.70
O	3.35	3.45
P	2.56	2.96
Q	3.15	3.25
R	2.20	2.45

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60HZ, resistive or inductive load.  
 For capacitive load, derate current by 20%




**Lead Free**


CHARACTERISTICS	SYMBOL	MBR30150FCT	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	150	V
Maximum RMS Voltage	VRMS	105	V
Maximum DC Blocking Voltage	V <sub>cc</sub>	150	V
Maximum Average Forward Rectified Current	I(AV)	30	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC METHOD)	IFSM	250	A
Maximum Forward Voltage at 15A DC	VF	0.95	V
Maximum DC Reverse Current @TC=25°C at Rated DC Blocking Voltage @TC=125°C	IR	0.15 30	MA
Typical Thermal Resistance	ROJC	1.4	°C/W
Operating Temperature Range	TJ	-55to+175	°C
Storage Temperature Range	TSTG	-55to+175	°C

**RATINGS AND CHARACTERISTIC CURVES**


**FIG-1 FORWARD CURRENT DERATING CURVE**

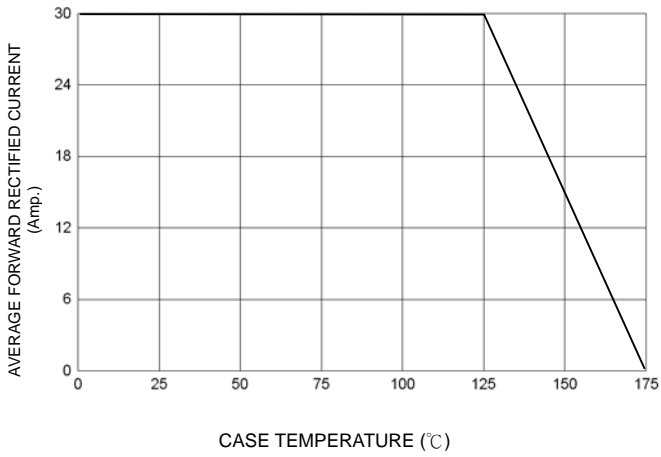


**FIG-2 TYPICAL FORWARD CHARACTERISTICS**

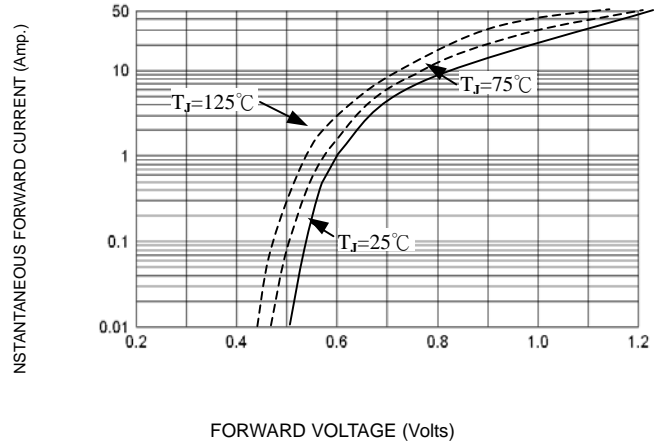

**FIG-3 TYPICAL REVERSE CHARACTERISTICS**

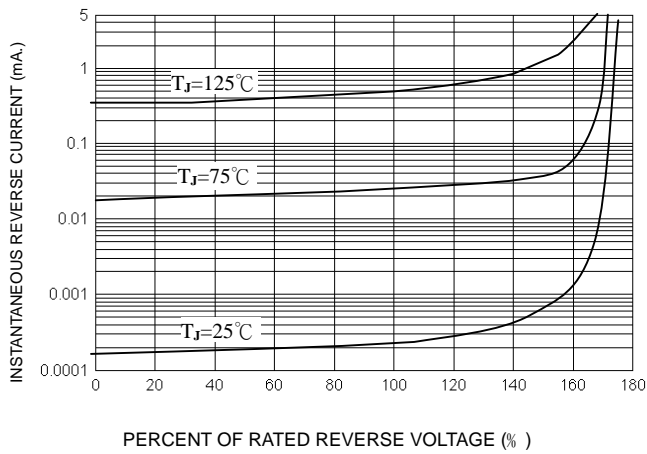

**FIG-4 TYPICAL JUNCTION CAPACITANCE**

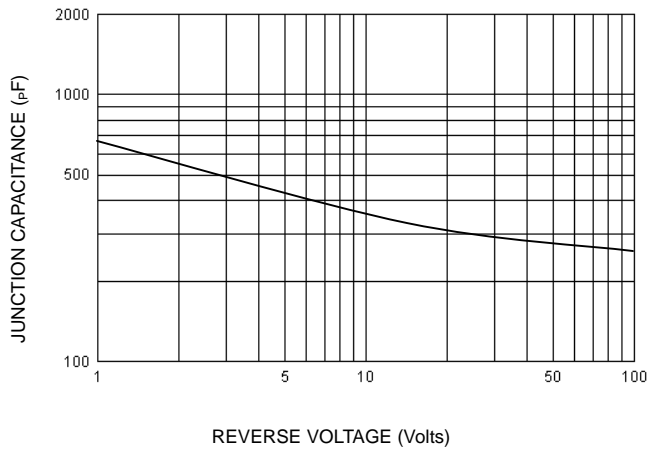

**FIG-5 PEAK FORWARD SURGE CURRENT**

